

3/2 - Way Control Valve 7082

with integrated positioner

1/2" up to 2" 580 psi mixing function



Pneumatically operated 3/2-way valve for the control of neutral and highly aggressive media.

- Integrated positioner
- Compact design
- All parts in contact with medium made from stainless steel
- For temperatures up to +392°F
- Working pressure up to 235 psi

Pneumatically operated 3/2-way control valve in stainless steel with integrated positioner for the control of neutral and aggressive media.

- Compact design
- All parts in contact with medium made from stainless steel
- No moving parts accessible from the exterior
- Non-contact stroke feedback (inductive sensor)
- Operation independent of position and control pressure
- Insensitive to vibration
- Instrument quality air not required for the feed air
- Flexible selection of characteristics using software



**with digital positioner
Type 8049**

Technical Information


Nominal sizes	1/2" up to 2"
Connections	NPT thread: 1/2" up to 2"
Nominal pressure	580 psi
Fluid temperature	-22°F up to + 392°F

Materials

Body	Stainless steel 316 L / 316 Ti
Seating seal	PTFE
Bonnet	Brass chrome plated (actuator Ø 3") Aluminium (actuator Ø 5")
Diaphragm actuator	stainless steel 1.4301
Actuator springs	Stainless steel ASTM A313 302 (actuator Ø 3", 10") Spring steel wire C, zinc coated (actuator Ø 5")
Packing	PTFE (carbon filled), spring ASTM A313 302
Valve stem	Stainless steel 316 Ti, roller burnished
Position indicator	PA Trogamid (clear)



3/2 - Way Control Valve in stainless steel 7082 with integrated positioner

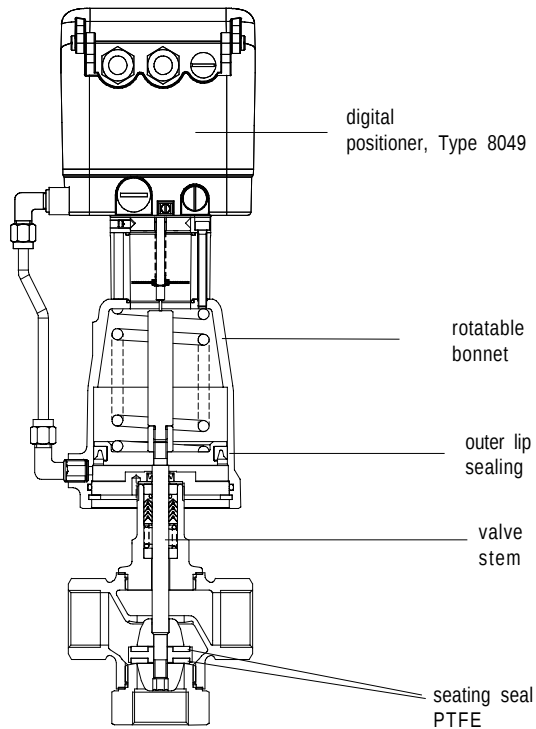

Cv-Values

DN	Cv - values			
	diverting function		mixing function	
	P1-A	P2-A	P1-A	P2-A
1/2"	8.7	6.4	6.4	8.7
3/4"	11.6	7.5	7.5	11.6
1"	16.2	11.6	11.6	16.2
1 1/4"	26.7	17.4	17.4	26.7
1 1/2"	52.2	31.3	31.3	52.2
2"	66.1	47.6	47.6	66.1

Positioner

For technical information of our positioners please refer to the corresponding data sheets.

3/2 - Way Control Valve in stainless steel

7082 with integrated positioner

Admissible Pressures

Diverting function

digital positioner Type 8049


DN	Differential pressure	Supply pressure range	Piston Ø	Springs
	psi	psi	inch	Number
1/2" / 3/4"	116	75 - 90	3"	2
1"	116	75 - 90	3"	3
1 1/4"	116	75 - 90	3"	3
1 1/2"	58	65 - 90	5"	4
1 1/2"	87	45 - 65	10"	6
2"	44	60 - 70	10"	6

Attention:

The maximum pilot pressure must not be exceeded since otherwise the piston rod would be damaged.

Recommendation:

In order to avoid a damage on the valve because of a too high supply air pressure, we recommend the use of a supply air pressure regulator.

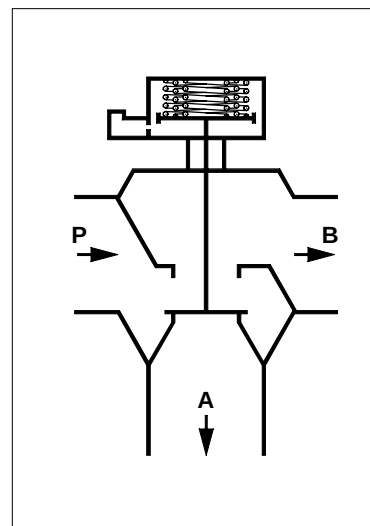

diverting function

Mixing function

digital positioner Type 8049


DN	Differential pressure	Supply pressure range	Piston Ø	Springs
	psi	psi	inch	Number
1/2" / 3/4"	218	75 - 90	3"	1
1/2" / 3/4"	232	45 - 50	5"	2
1"	123	75 - 90	3"	1
1"	232	45 - 50	5"	2
1 1/4"	73	75 - 90	3"	1
1 1/4"	160	50 - 55	5"	2
1 1/2"	160	65 - 90	5"	3
1 1/2"	189	45 - 65	10"	6
2"	87	75 - 90	5"	3
2"	131	60 - 70	10"	8

Attention:

The maximum pilot pressure must not be exceeded since otherwise the piston rod would be damaged.

Recommendation:

In order to avoid a damage on the valve because of a too high supply air pressure, we recommend the use of a supply air pressure regulator.

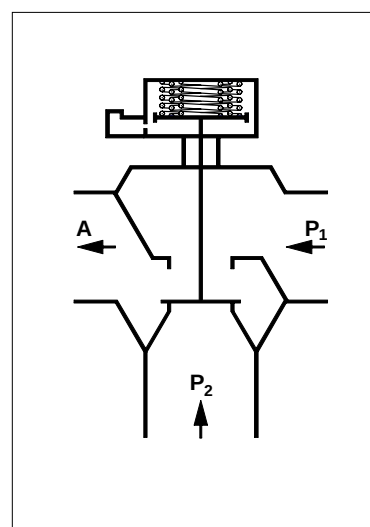

mixing function

3/2 - Way Control Valve in stainless steel

7082 with integrated positioner



Ordering Number System

7	0	8	2	/				1	2	3	4	5	6	7	8	9	10	11	12	13	14
								V											S		

Model	Size	Symbol: "V": Valve
		"A": Actuator (valve without body)
		"R": Repair kit (sealings)

1 - 6 : Please quote all 6 sections.

7 - 14: Quote only if required.

1. Body type		2. Connection		3. Body materials		4. Seat material		5. Pilot function		6. Actuator		7. Springs	
3	3/2-way control valve diverting function	0	Pipe thread acc. DIN EN 10226-1 ISO 228	2	stainless steel 316 L	0	PTFE (Teflon)	C	digital positioner, Type 8049, 4 wire	8	Piston 3" (NPT)	-	Standard
4	3/2-way control valve mixing function	5	NPT thread					R	digital positioner Type 8049, 2 wire	9	Piston 5" (NPT)	R	4 springs (D 10")
								T	digital positioner Type 8049, AS-i version	D	diaphragm D 10" (NPT)	T	6 springs (D 10")
												W	8 springs (D 10")
8. Characteristic		9. Packing		10. Cv-value		11. Accessories		12. Special versions		13. Seal		14. Position indicator	
-	Linear	-	Standard	-	full Cv-value	-	without	S	To state if some stations are quoted!	-	Standard	5	metal tie-on label with typelabel and protection film
		2	Packing underneath (vacuum)										


Ordering Example: 7082/020V4520C8

3/2-way control valve in stainless steel, 3/4", NPT-thread, seat material PTFE, digital positioner Type 8049, 4 wire, actuator 3" NPT, linear flow characteristic, K_{vs} 100 %

3/2 - Way Control Valve in stainless steel

7082 with integrated positioner

Dimensions and Weights

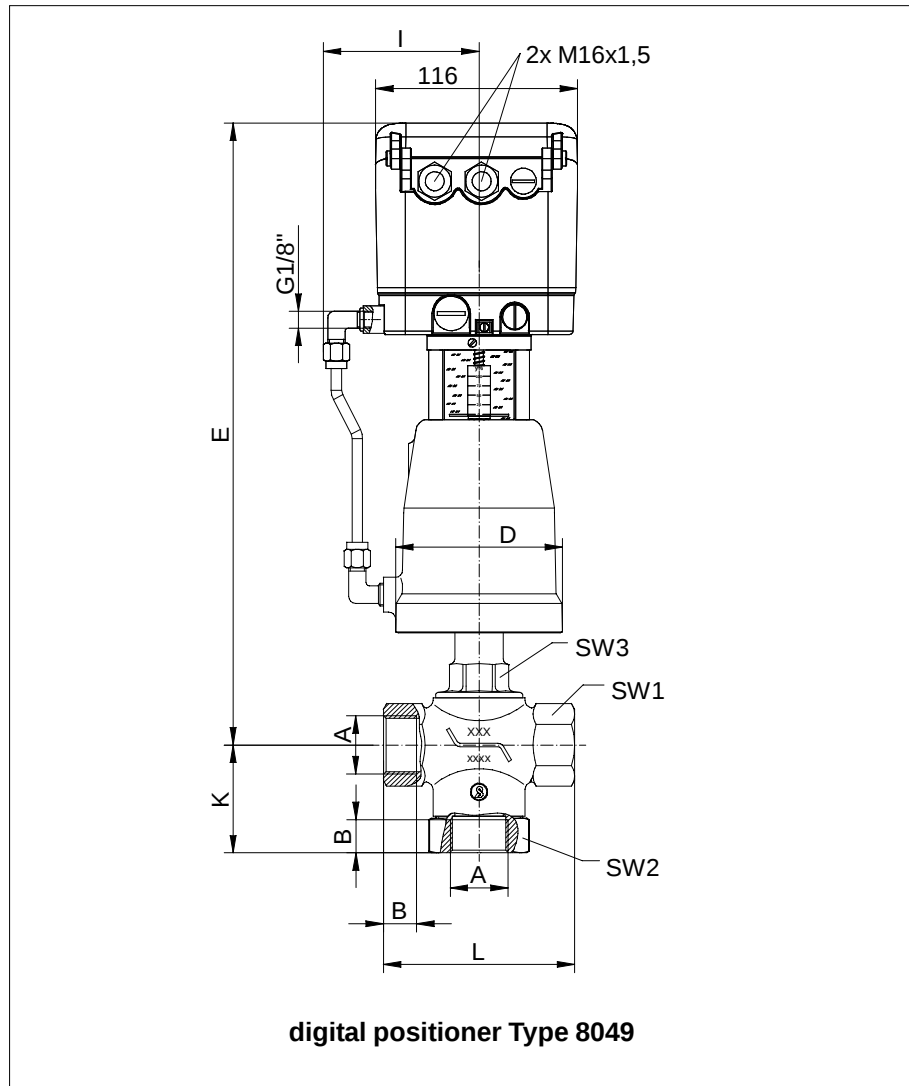


DN	Actuator	A NPT	B NPT	B NPT	D	K	L	I	E	Stroke	SW1	SW2	SW3	Weight (lbs) Type 8049
1/2"	3"	1/2"	0.59	0.57	3.78	2.44	3.54	3.54	13.62	0.55	1.02	1.61	1.18	10.3
1/2"	5"	1/2"	0.59	0.57	5.75	2.44	3.54	4.13	14.41	0.55	1.02	1.61	1.18	14.5
3/4"	3"	3/4"	0.64	0.59	3.78	2.44	3.54	3.54	13.62	0.55	1.26	1.61	1.18	10.3
3/4"	5"	3/4"	0.64	0.59	5.75	2.44	3.54	4.13	14.41	0.55	1.26	1.61	1.18	14.5
1"	3"	1"	0.75	0.71	3.78	2.48	4.33	3.54	14.09	0.55	1.61	2.17	1.18	11.2
1"	5"	1"	0.75	0.71	5.75	2.48	4.33	4.13	14.88	0.55	1.61	2.17	1.18	15.4
1 1/4"	3"	1 1/4"	0.84	0.72	3.78	2.91	5.12	3.54	14.25	0.59	1.89	2.56	1.18	12.5
1 1/4"	5"	1 1/4"	0.84	0.72	5.75	2.91	5.12	4.13	15.04	0.59	1.89	2.56	1.18	16.7
1 1/2"	5"	1 1/2"	0.84	0.72	5.75	3.46	5.51	4.13	15.63	0.91	2.28	2.95	1.26	18.7
2"	5"	2"	1.01	0.75	5.75	3.74	7.09	4.13	16.14	0.91	3.35	3.54	1.42	25.7

Dimensions in inch

3/2 - Way Control Valve in stainless steel 7082 with integrated positioner

Dimensions and Weights

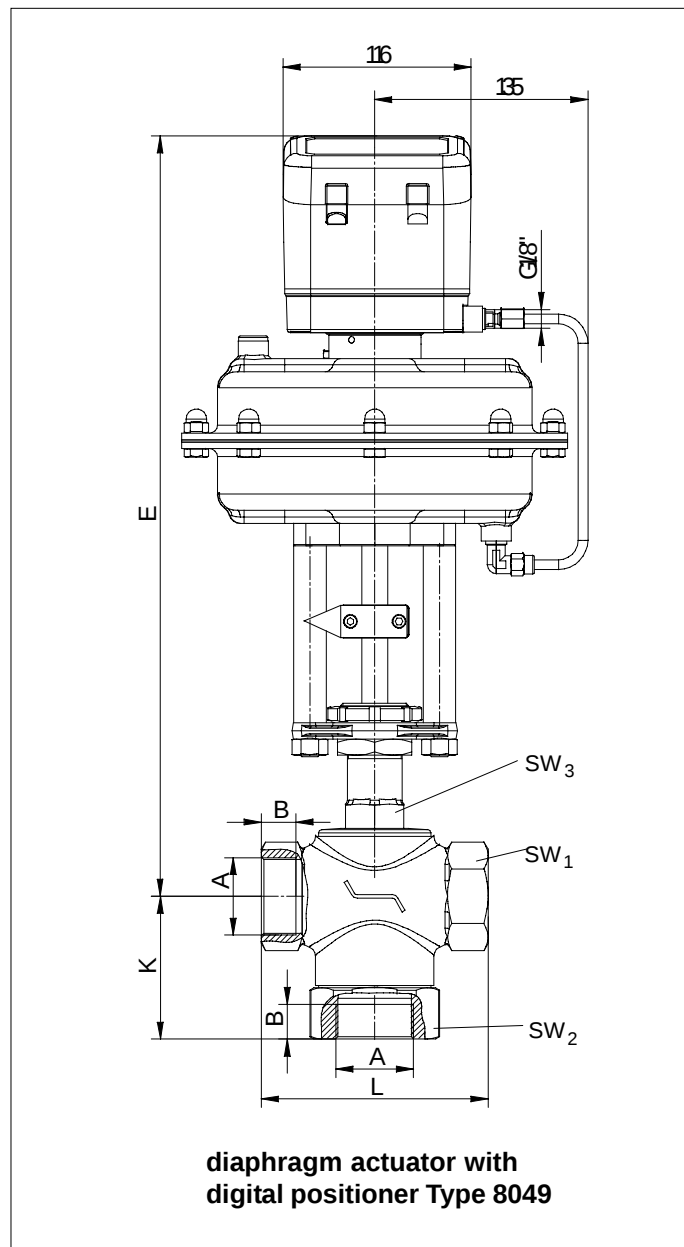

DN	Actuator	A NPT	B	B NPT	D	K	L	E	Stroke	SW1	SW2	SW3	Weight (lbs)
1 1/2"	10"	1 1/2"	0.84	0.72	9.45	3.46	5.51	18.5	0.91	2.28	2.95	1.26	30.8
2"	10"	2"	1.01	0.75	9.45	3.74	7.09	18.9	0.91	3.35	3.54	1.42	37.8

Dimensions in inch