

## Model RCDL Register

Mechanical Register  
Non-Resettable


# Technical Brief

### GENERAL


Well proven basic totalizer used for inventory and process control where totalization is the only functional need of the product.

### OPERATION


The model RCDL register is available on RCDL disc meters and Industrial Turbo meters. The standard RCDL Register for the RCDL disc meters is designed for metering liquids up to 120° F and is available in several units of measure. On the Industrial Turbo meters, the register is designed to meter liquids up to 250° F. These higher temperature units are available in U.S. gallons for both style meters, liters for disc meters, and cubic meters for Industrial Turbo meters. If the higher temperature register is selected for use on the RCDL disc meter, the appropriate higher temperature rated disc meter option must be used.




Model 25 nutating disc  
meter with standard dial  
face in U.S. gallons



2" Industrial Turbo meter  
dial face in U.S. gallons

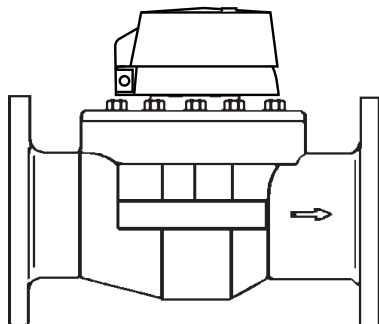

RCDL (Register) shown on Turbo meter

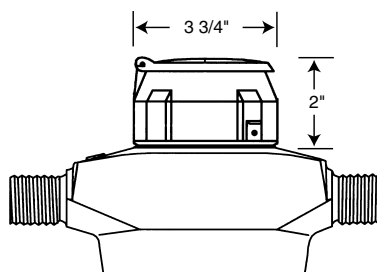

RCDL (Register) shown on Disc meter

ITB-104-03

3-09



Please see our website at  
[www.badgermeter.com](http://www.badgermeter.com)  
for specific contacts.



**BadgerMeter, Inc.**

P.O. Box 245036, Milwaukee, WI 53224-9536  
Telephone: (414) 355-0400 / (800) 456-5023  
Fax: (414) 355-7499 / (866) 613-9305  
[www.badgermeter.com](http://www.badgermeter.com)

Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding bid obligation exists.