

## Mechanical Unscaled Transmitters

Models FT-1, PFT-2 & FT-2XP

### OVERVIEW

The Models FT-1, PFT-2 and FT-2XP transmitters are designed for use with Badger Meter magnetic drive meters. Mounted on the meter, the transmitter can be wired to the PC-100 batch controller, ER-8 and ER-9 registers, or other pulse-operated instruments that have scaling capabilities and that can receive pulses from a reed switch.

The FT-2XP transmitter is identical to the PFT-2 except for the housing. The PFT-2 transmitter has a glass-filled plastic housing and a NEMA 4X rating. The FT-2XP transmitter housing is cast bronze and is CSA listed for use in hazardous locations. The FT-1 is offered only on the OP meter and is mounted in the OP housing directly with a stainless steel cover.

These transmitters do not have gear trains. The reed switch is directly coupled to the drive magnet within the meter.

### OPERATION

The flow of liquid through the meter is measured by a disc or piston metering element. The motion of the metering element is transferred to a magnet which is located within the meter housing.

As the magnet turns, it causes the reed switch to open and close. Contact closures from the switch are transmitted to a remote batch controller or counter.

### APPLICATIONS

These transmitters are normally connected to metering systems that have scaling capabilities and that can accept a reed switch pulse.


Typical applications would be chemical batching systems, chemical additive systems and other applications that require totalizing meter flow and monitoring rate of flow of fluid passing through the flow meter.



FT-2XP (rear) and PFT2 Transmitters

### FEATURES

- FT-2XP transmitter is CSA listed for Class I, Division 1, Group D
- Does not require external power
- Rugged, cast bronze housing (FT-2XP only)
- Corrosion resistant plastic enclosure (PFT-2 only)
- High temperature rating: is 250° F
- Watertight, NEMA 4 (bronze) or NEMA 4X (plastic)
- Hermetically sealed reed switch output
- Compatible with most flow controllers and counters with scaling capabilities
- Stainless steel cover (FT-1 only)

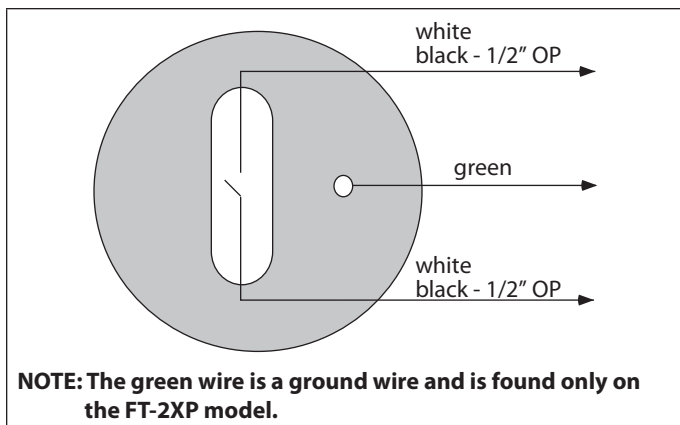

**Wiring Diagram**

## SPECIFICATIONS

<b>FT-2XP Rating</b>	10 W max., 200V DC max., 500 mA DC max. or 7 W, 110V AC max., 350 mA AC max. resistive
<b>Duty Cycle</b>	Approximately 50%
<b>Operating Temperature</b>	250° F maximum
<b>Weight</b>	Bronze, 5 lb Plastic, 2 lb

## SCALE FACTOR CALCULATION

$$\text{Scale Factor} = \frac{\text{Pulses per gallon wanted}}{\text{Transmitter output in pulses per gallon}}$$

See the chart to the right for the average number of output pulses per gallon for your particular meter. For more precise calculations, use the information on the transmitter data plate when figuring scale factors.

### Example:

Compute the scale factor for a 1" OP meter. You want to measure the flow to the nearest 0.1 gallon.

$$\text{Scale Factor} = \frac{10}{76.64} = 0.1305$$

Enter 0.1305 into the controller program to read the meter flow to the nearest 0.1 of a gallon.

Size (Inches)	Meter Model	Transmitter Output (Pulse/Gallon)	Transmitter Output (Pulse/Liter)
5/8"	RCDL 25	198.40	52.42
3/4"	RCDL 35	126.67	33.47
1"	RCDL 40	89.80	23.73
1"	RCDL 70	46.80	12.36
1-1/2"	RCDL 120	23.80	6.28
2"	RCDL 170	14.56	3.85
1/2"	OP/FT-2XP	222.96	58.91
1/2"	OP/PFT-2	222.96	58.91
1/2"	OP/FT-1	111.48	29.45
1"	OP	76.64	20.25
2"	OP	20.56	5.43
1-1/2"	160 Turbo Series	1.5366	0.4059
2"	200 Turbo Series	1.5366	0.4059
3"	450 Turbo Series	1.5982	0.4222
4"	1000 Turbo Series	1.6650	0.4399
6"	2000 Turbo Series	0.1501	0.0396
8"	3500 Turbo Series	0.1514	0.0400
10"	5500 Turbo Series	0.1980	0.0523
12"	6200 Turbo Series	0.1287	0.0340
16"	6600 Turbo Series	0.0155	0.0040
20"	10000 Turbo Series	0.0090	0.0023

	FT-2XP	PFT-2	FT-1
RCDL Disc	X	X	
OP	X	X	X
Turbo Series	X	X	

Trademarks appearing in this document are the property of their respective entities.

Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2012 Badger Meter, Inc. All rights reserved.

[www.badgermeter.com](http://www.badgermeter.com)

**The Americas | Badger Meter** | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400  
**México | Badger Meter de las Americas, S.A. de C.V.** | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882  
**Europe, Middle East and Africa | Badger Meter Europa GmbH** | Nurtlinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0  
**Czech Republic | Badger Meter Czech Republic s.r.o.** | Mařikova 2082/26 | 621 00 Brno, Czech Republic | +420-5-41420411  
**Slovakia | Badger Meter Slovakia s.r.o.** | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01  
**Asia Pacific | Badger Meter** | 80 Marine Parade Rd | 21-04 Parkway Parade | Singapore 449269 | +65-63464836  
**China | Badger Meter** | Rm 501, N° 11 Longyue Apartment | N° 180 Longjin Rd, Jiuting Songjiang District | Shanghai, China | 201615 | +86-21-5763 5412